



0845 130 3300 sales@pumpexpress.co.uk



**PEGASUS VORTEX 200**

Submersible vortex pump suitable for sewage water including solids.

Particularly recommended for domestic waste water plants, industrial water treatment and agricultural uses.

Built for heavy duty use with cast iron pump housing, back and open type impeller. Oil bathed motor with stainless steel shaft.

Double mechanical seal in oil chamber: silicon carbide / ceramic carbon.

Supplied with 10 m of H07RNF cable.

Single-phase 230V / 50Hz with built in capacitor and motor protector.


Protection class IP 68. Insulation class F.

Max liquid temperature 50° C

Max solids density 1100kg / m3

**Performance Data**

Model	Power		Voltage	Head (m)					
	hP	kW		2	4	6	8	10	12
PEGASUS VORTEX 200	2	1.5	230/50/1 400/50/3	Capacity (l/min)					
				570	480	370	245	100	

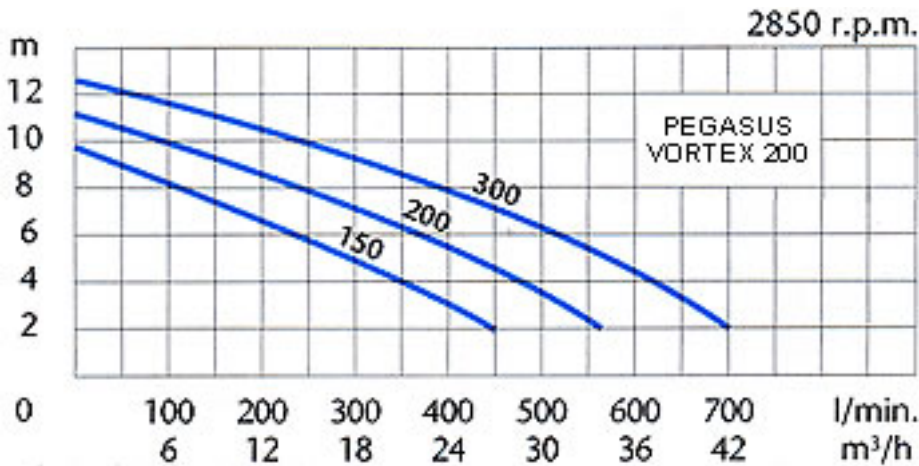

**Dimensions**

Model	Outlet	Max Solids mm	Dimensions mm					Weight kg
			A	B	C	D	E	
PEGASUS VORTEX 200	3"	50	520	226	275	255	550	34

