


CURVE E DATI DI PRESTAZIONE A n= 2900 1/min

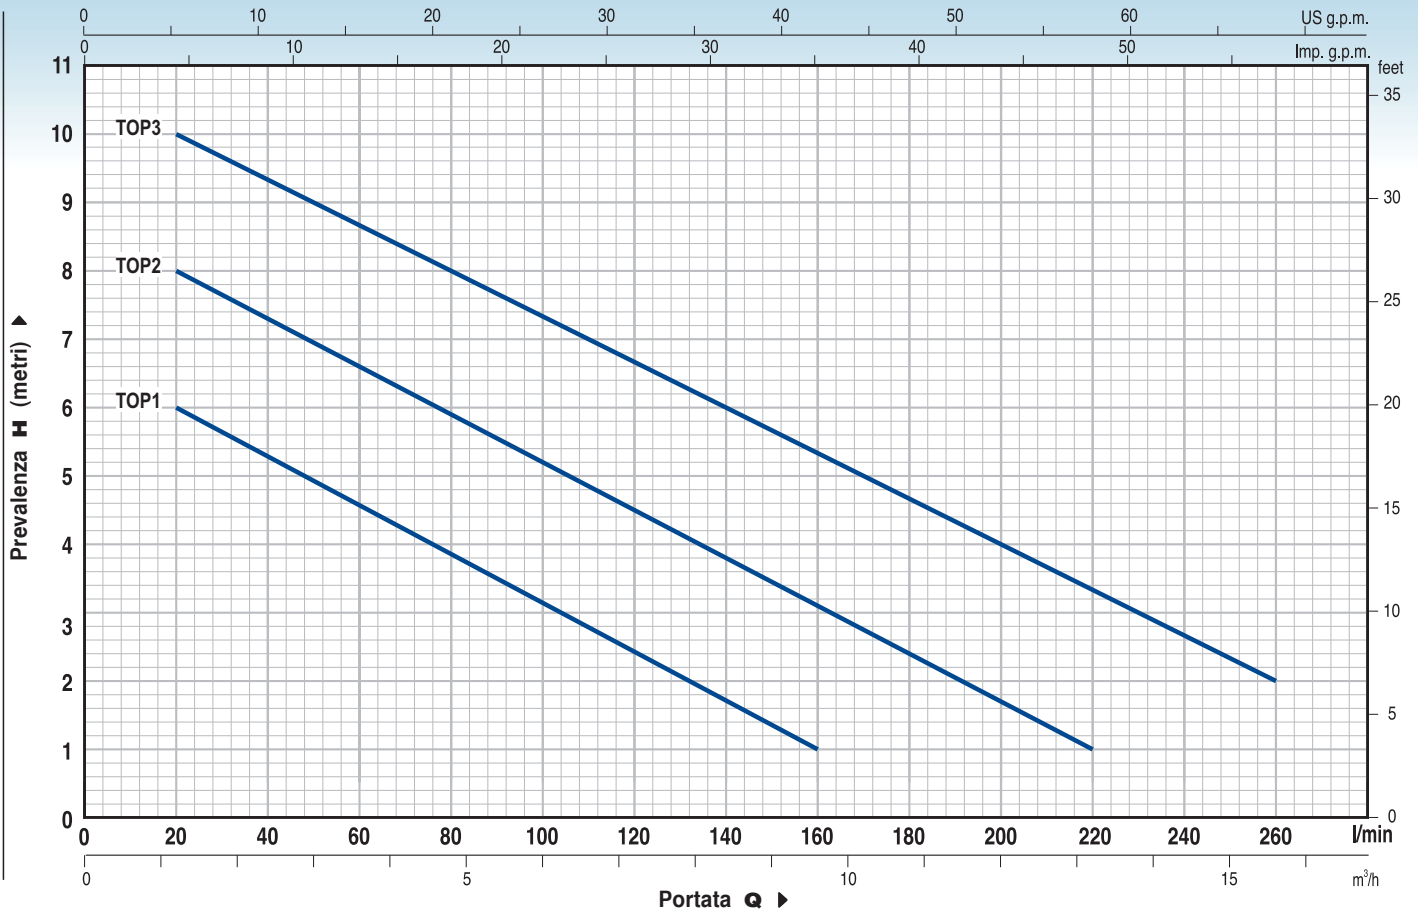


TIPO Monofase	POTENZA		Q	Flow Rate (Q)														
	kW	HP		m³/h	0	1.2	2.4	3.6	4.8	6.0	7.2	8.4	9.6	10.8	12	13.2	14.4	15.6
			l/min	0	20	40	60	80	100	120	140	160	180	200	220	240	260	
TOP 1	0.25	0.33	H (metri)	7	6	5.5	4.5	4	3	2.5	1.8	1						
TOP 2	0.37	0.50		9	8	7.5	6.5	6	5.5	4.5	4	3	2.5	1.8	1			
TOP 3	0.55	0.75		10.5	10	9	8.8	8	7.5	6.5	6	5.5	4.8	4	3.5	2.5	2	

Q = Portata H = Prevalenza manometrica totale

Tolleranza delle curve di prestazione secondo EN ISO 9906 App. A.

DIMENSIONI E PESI

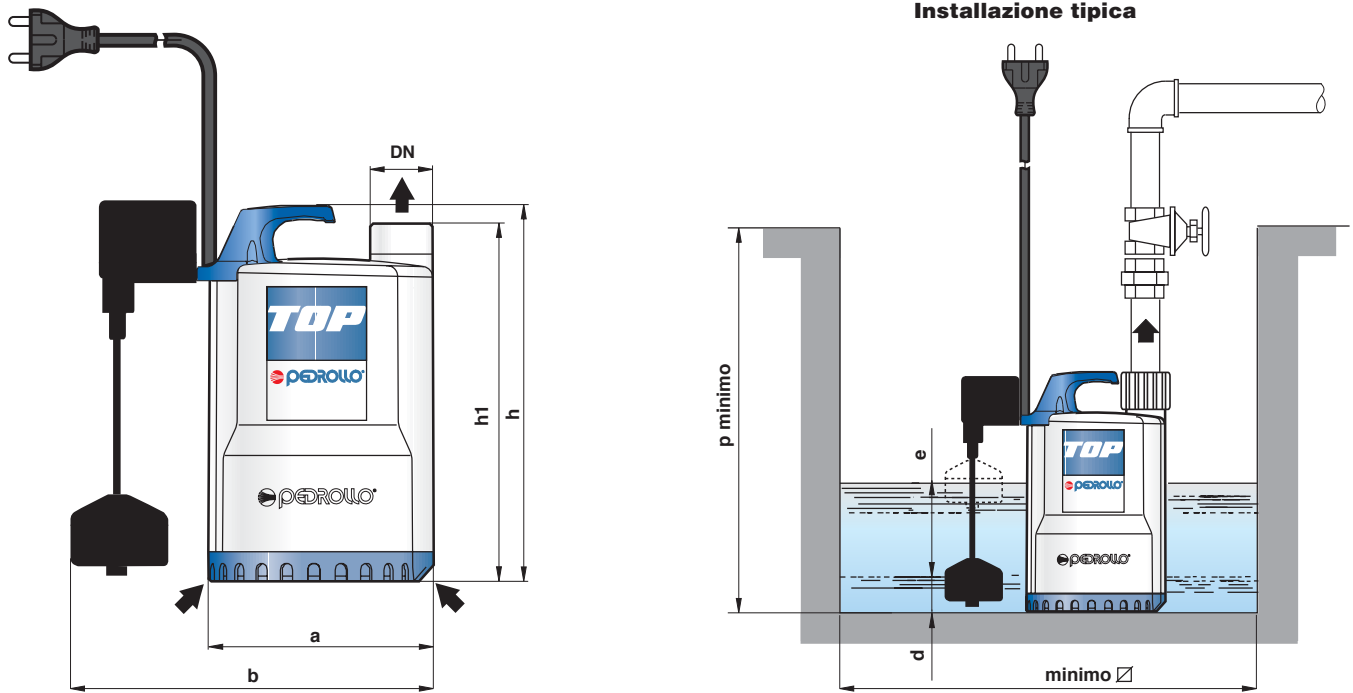

TIPO Monofase	BOCCA DN	DIMENSIONI mm								kg
		a	b	h	h1	d	e	p	∅	
TOP 1	1"	152	230	232	217	20	135	350	220	4.1
TOP 2	257			237	30	155	5.0			
TOP 3	287			267	60	185	6.4			