

SUBMERSIBLE

The **LB480** pump has a tough pressed steel strainer base and body, with a dual position outlet port. A combination of a rubber pump chamber and a urethane vortex impeller reduces wear and blockages, and maintains reliability. The 403 stainless steel shaft is fitted with a double mechanical seal, (in an oil chamber), and an Oil Lifter to maintain seal lubrication during operation in any position. Considered the "hire industry standard", earlier models have been used in this trade since the mid-70's.




LB 480 manual



LB 480 pump

- 50mm (2")
- manual
- automatic
- 110 volts
- 230 volts

- ✓ Hire fleets
- ✓ Utilities
- ✓ Industry
- ✓ Water Features

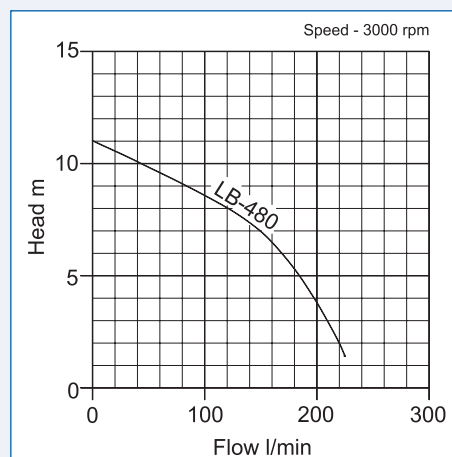

LB 480 automatic

ACCESSORIES

- Hoses page **79**
- Hose Joiners page **85**
- Hose Clips page **87**

model	Manual or Auto	outlet	kW	volt	flow l/min	head (mtrs)	w x l x h (mm)	on level (mm)	off level (mm)	free passage (mm)	weight (kgs)
LB-480	M	2"	0.48	110	225	11	187x187x275	-	-	6	10.4
LB-480	M	2"	0.48	230	225	11	187x187x275	-	-	6	10.4
LB-480	A	2"	0.48	110	225	11	187x370x275	330	105	6	10.8
LB-480	A	2"	0.48	230	225	11	187x370x275	330	105	6	10.8